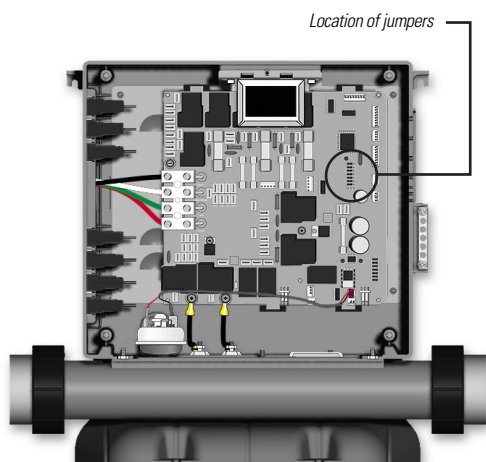


Jumper selection

It is possible to change parameters of the MC-MP pack by configuring specific jumpers located on the board.

To access jumpers, first unscrew the 5 screws holding on the plastic power box cover (requires a flat screwdriver).

Jumpers are located in the upper right of the board. To change a setting, simply pull jumper cover off pins and move it to the new desired position.

Jumper 1

Current limiting option

Jumper 1 is used to limit the current drawn when more than 1 pump (or a pump and blower) are activated at the same time.

Position 1 = **HC (High Current) mode**
Heater will be turned off if more than 2 pumps are on at high speed.

Position 2 = **LC (Low Current) mode**
The heater may not be turned on if any pump (1, 2 or 3) is on at high speed.

The "Heater" indicator will flash to indicate a request for heat, but the heater will not be allowed to start.

Jumper 2

Keypad configuration:

Position 1 = **10-key configuration**.
Position 2 = **8-key configuration**.

Jumper 3

Keypad model:

Position 1 = **K-4**.
Position 2 = **K-8**.

Jumper 4

Keypad model:

Position 1 = **K-47**.
Position 2 = **K-8**.

Low level programming

Note: Restricted to Gecko factory or authorized installer.

Certain system operating parameters can be configured from the keypad. This is normally done by Gecko or the spa installer, but may be done any time.

To access low level programming, press and hold **On/Off** key (K-8 or K47) or **Econo** key (K-4) for 20 seconds, after which the first parameter code should appear on the display.

Use **Up/Down** keys to modify parameter values and **On/Off** key (K-8 or K47) or **Econo** key (K-4) to change from one parameter to the next. You must go through all parameters to exit this mode. If you do not wish to change a parameter, simply press **On/Off** key (K-8 or K47) or **Econo** key (K-4) to advance to the next parameter.

List of parameter configurations

- 1- **Pump 1** Display: P1 x
Value of x: 1 = single-speed
2 = two-speed
- 2- **Pump 2** Display: P2 x
Value of x: 0 = not installed
1 = single-speed
2 = two-speed
- 3- **Pump 3** Display: P3 x
Value of x: 0 = not installed
1 = installed
- 4- **Blower** Display: bL x
Value of x: 0 = not installed
1 = single-speed
2 = two-speed
3 = three-speed
- 5- **Light** Display: LI x
Value of x: 0 = not installed
1 = 12 VAC (single-intensity)
2 = 12 VAC (triple-intensity)
3 = 120 VAC (single-intensity on auxiliary 1 relay)
4 = Internal fiber box control mode (2-aux. relay)
- 6- **Ozone** Display: O3 x
Value of x: 0 = not installed
1 = on only in Filter cycle
2 = always on
3 = on with circ. pump
- 7- **Circ. pump** Display: CP x
Value of x: 0 = not installed
1 = regulated (with spa temp.)
2 = always on
3 = on, except if 2" over set point
- 8- **Filter cycle** Display: FC x
Value of x: 0 = filter cycle with Pump 1
2 = filter cycle with Circ. Pump
1 = Filter cycle replaced by purge cycle
- 9- **Pressure switch status** Display: PS x
Value of x: 0 = with Pump 1
1 = with circ. pump (CP cannot be at 0)
- 10- **Timeout output** Display: To x
Value of x: 0 = 20 minutes
1 = 30 minutes
2 = 40 minutes
- 11- **Current for Pumps 1 - 2 - 3**
Display: C1,2,3 x
Value of x: Amperage drawn by each pump (1 to 15 amps) (default at 15 amps)
Display: Cb x
Value of x: Amperage drawn by blower (1 to 8 amps) (default at 8 amps)
Display: CH x
Value of x: Amperage drawn by heater (12 to 23 amps) (default at 23 amps)



Gecko Alliance

450 des Canetons, Québec (QC) G2E 5W6 Canada, 800.78.GECKO, Fax: 418.872.0920
9225 Stellar Court, Corona, CA 92883 USA, 951.667.2000, Fax: 951.667.2902

www.geckoalliance.com