

## 32" Channel Drain Anti-Entrapment (Anti-Vortex) Suction Outlet Cover and Frame

### VGB Series

#### Product Specification Sheet

The AquaStar line of suction outlet covers, compliant with the new Virginia Graeme-Baker Pool and Spa Safety Act (ASME/ANSI A112.19.8a-2008)

#### Features

A single, unblockable suction outlet that exceeds the new VGB mandate and ASME/ANSI A112.19.8a-2008 standard

For single or multiple drain use (see installation instructions for plumbing, hydrostatic valve/drain pipe and single or multi-pump connections)

##### Single

Floor: 236 GPM at 3.4 fps  
Wall: 136 GPM at 1.9 fps

##### Dual

Floor: 472 GPM at 3.4 fps  
Wall: 272 GPM at 1.9 fps  
Floor/wall: 211 GPM at 1.5 fps

22.6 square inch opening

#316 stainless steel screws


Manufactured from superior UV-resistant engineered polymers

Meets or exceeds NSF 50/ASME/ANSI A112.19.8a-2008 national standards and ASTM G154 UV testing

Listed with IAPMO R&T

12 per case

### The Unblockable!™

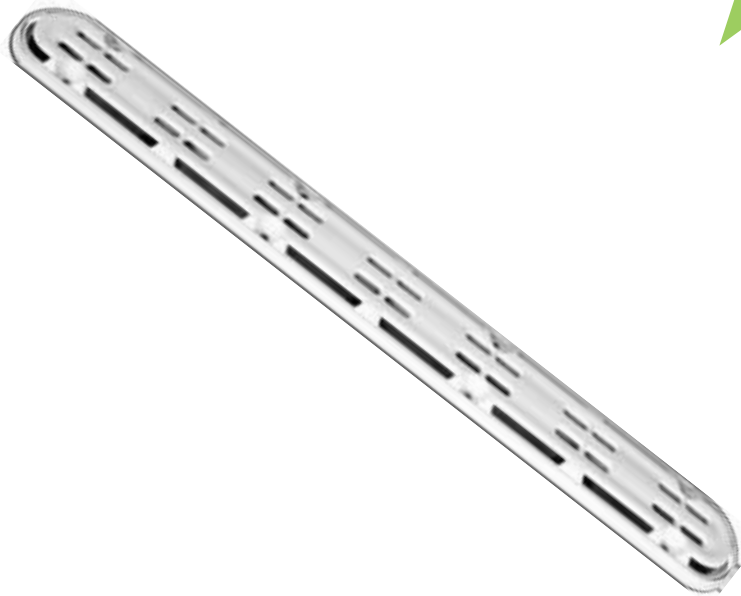



For field-fabricated sump (concrete pools)  
Model # 32CDAVFRxxx

### Two Drains in One!!!

#### Part Numbers / Colors

- ☐ 32CDAVFR101 White
- ☒ 32CDAVFR102 Black
- ☐ 32CDAVFR103 Lt. Gray
- ☐ 32CDAVFR104 Blue
- ☐ 32CDAVFR105 Dk. Gray
- ☐ 32CDAVFR106 Bone
- ☐ 32CDAVFR107 Taupe
- ☐ 32CDAVFR108 Tan

**VGB 2008  
Compliant**

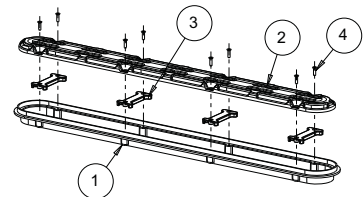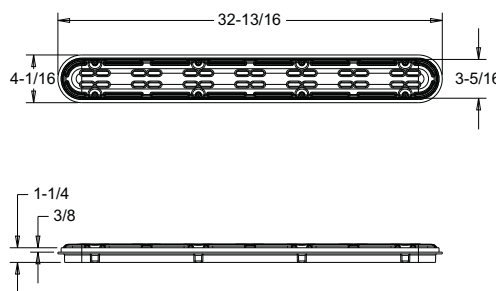

1. 32" channel drain, anti-entrapment, no sump, frame
2. 32" channel drain, anti-entrapment, no sump, cover
3. 32" channel drain, anti-entrapment, no sump, support, "dog bones" to be removed prior to suction outlet cover installation
4. #10 flat head phillips screw