

Cleaner water. Less to maintain.

Introducing the state-of-the-art Jacuzzi [®]JHX Pro Grade Sand Filter.Designed with durability in mind, the Jacuzzi [®]JHX Filter is built to perform and built to last.





JHX-Sand

The Jhx Pro Grade Sand Filter offers the best combination of economy, performance, durability and ease of maintenance. The corrosion resistant, one-piece, extra-thick molded polyethylene tank assures long service life. Top-mounted, corrosion-resistant multiport selector valve included. Also includes a convenient tank winterizing drain and continuous air relief system.

Available in 16 in., 19 in, and 24 in.


JHX Sand SPECS



MODEL	TANK SIZE	PUMP (HP)	SAND	TURNOVER CAPACITY
NUMBER	TAINK SIZE		REQUIRED	(GAL/8 HOURS)
JHX100	16"	1.5 2speed	100 LBS	16,800
JHX150	19"	2.0 2speed	150 LBS	19,200
JHX300	24"	2.0 2speed	300LBS	28,800

Free upgrade to Dual Speed Pump with filter package.

Use less energy with Jacuzzi[®] Dual Speed Pumps. A free upgrade with JHX Sand Filter Package. Ask a Leslie's associate for details.

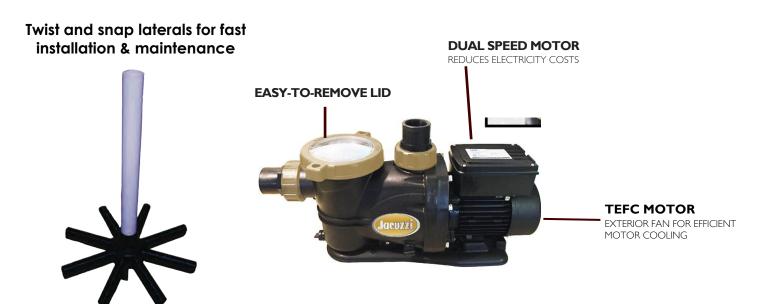

Must be installed by a pool professional to qualify for extended warranty. Must be a Leslie's Rewards Member to qualify for any extended warranty. Contractor's #'s: AZ-Res-ROC122732, AZ-Comm-ROC256424, CA-755161, CT-PLM.0284528-SP, FL-CPC057127, FL-26806, NC-28806-SP-SP, NJ-13VH04768200, NV-35903, NY-44003-H, NY-H28063502, PA-PA067663, TX-TICL232.

© 2018 Jacuzzi Inc. All rights reserved, Jacuzzi® is a registered trademark of Jacuzzi Inc. and used under license agreement. All other brands, product names, company names, trade names and trademarks used are the property of their respective owners, Jacuzzi may add to, change or remove any part of these materials at any time, without notice. Reproduction in whole or in part without written permission is prohibited. International products may be configured differently to meet local electrical requirements. Dimensions are approximate.