



StarClear™ Series

»»» Cartridge Filters

TRUSTED PERFORMANCE,
EASY MAINTENANCE





STARCLEAR™


Rotatable filter head provides easy access to cartridge element, gauge and manual air relief valve

Injection-molded filter tank for dependable, corrosion-free performance

Extra-large, single-element cartridge with new precision engineered core and gasketed molded end caps provides extra strength and maximum flow

Elevated filtered water collector with debris sump prevents accidental bypass of heavy debris to pool or spa when cartridge is removed for cleaning

1/2" filter drain valve provides fast draining for elevated spas and tubs (also accepts standard spigot valve)

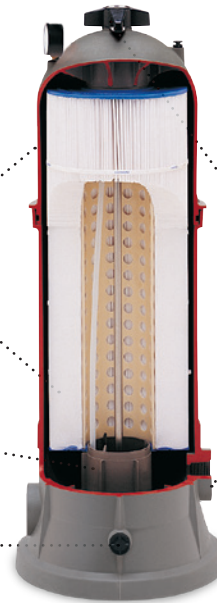

STARCLEAR™ PLUS

Single-locking knob securely fastens filter head to filter tank without clamps or bolts

1/2" or 2" FIP or 2" SKT connections (adapters provided on some models) for plumbing versatility

SPECIFICATIONS

	C250	C500	C751	C7512	C900	C9002	C1200	C12002	C17502
Effective Filtration Area	25 ft ²	50 ft ²	75 ft ²	75 ft ²	90 ft ²	90 ft ²	120 ft ²	120 ft ²	175 ft ²
Pipe Size	1 1/2"	1 1/2"	1 1/2"	2"	1 1/2"	2"	1 1/2"	2"	2"
Dimensions (Height x Width)	19 1/2" x 10 1/2"	29 1/2" x 10 1/2"	30" x 13 3/8"	30" x 13 3/8"	30" x 13 3/8"	30" x 13 3/8"	36" x 13 3/8"	36" x 13 3/8"	42" x 13 3/8"

RESIDENTIAL PERFORMANCE DATA

MODEL NUMBER	DESIGN FLOW RATE*	TURNOVER	
		8 HOURS	10 HOURS
C250**	25 GPM	12,000 gal	15,000 gal
C500**	50 GPM	24,000 gal	30,000 gal
C751	75 GPM	36,000 gal	45,000 gal
C7512			
C900	90 GPM	43,200 gal	54,000 gal
C9002			
C1200	120 GPM	57,600 gal	72,000 gal
C12002			
C17502			

PUBLIC AND APSP-15 PERFORMANCE DATA

MODEL NUMBER	DESIGN FLOW RATE*	TURNOVER	
		8 HOURS	10 HOURS
C250**	9 GPM	4,500 gal	5,625 gal
C500**	18 GPM	9,000 gal	11,250 gal
C751	28 GPM	13,500 gal	16,875 gal
C7512			
C900	34 GPM	16,200 gal	20,250 gal
C9002			
C1200	45 GPM	21,600 gal	27,000 gal
C12002			
C17502			

Public and APSP-15 Design Flow Rate based on .375 GPM/ft²

*Determined by pump size and piping system hydraulics; 2" piping is recommended for flow rates of 90 GPM (341 LPM).

**NSF-certified StarClear cartridge filters.

» hayward.com » 1-888-HAYWARD

Pumps » Filters » Heating » Cleaners » Sanitization » Automation » Lighting » Water Features » White Goods

Hayward is registered trademark and StarClear is a trademark of Hayward Industries, Inc. © 2017 Hayward Industries, Inc. All other trademarks not owned by Hayward are the property of their respective owners. Hayward is not in any way affiliated with or endorsed by those third parties.

LITSTARC17

