

# CLEAN & CLEAR®


## ABOVEGROUND CARTRIDGE FILTER SYSTEM

So clean. So clear. So easy.

We've paired our dependable OptiFlo® Aboveground Pump with our highly efficient Clean & Clear Filter to create this high-performance system for aboveground pools. Rugged, efficient and simple to operate, these perfectly matched components will keep your aboveground pool clean, clear and inviting—with minimal care.

So, if you're looking for top-end aboveground system performance that's easy to maintain,, look no further than the Clean & Clear Filter System from Pentair.



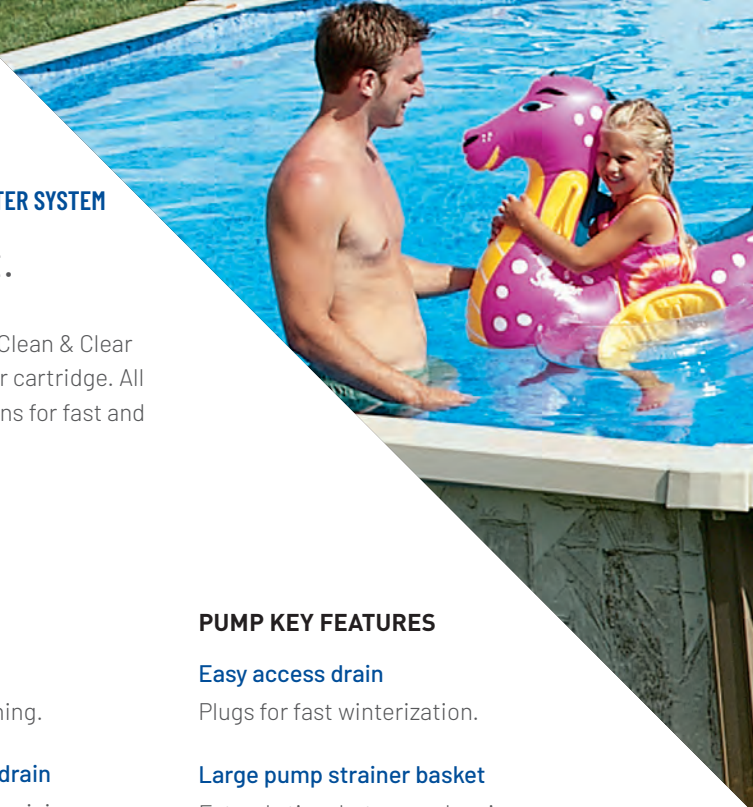

**CLEAN & CLEAR® ABOVEGROUND CARTRIDGE FILTER SYSTEM**

Carefree and convenient.

Like all Pentair cartridge filter systems, the Clean & Clear Filter System features an easy-to-clean filter cartridge. All models are equipped with easy spin-on unions for fast and economical plumbing hookups.



**KEY FEATURES**

**Single-piece filter base and body**

Designed for strength, durability and quiet operation.

**Fiberglass-reinforced construction**

For strength, durability and reliability.

**System sizes to suit your configuration**

Available in single- and two-speed models.

**FILTER KEY FEATURES**

**Removable filter cartridge**

For quick, convenient cleaning.

**Filter lock ring and 1" filter drain**

Allows for quick and easy servicing.

**Optimum filtration efficiency**

High Flow™ Manual Air Relief Valve and continuous internal air relief work to help eliminate air accumulation and maintain optimum filtration efficiency.

**PUMP KEY FEATURES**

**Easy access drain**

Plugs for fast winterization.

**Large pump strainer basket**

Extends time between cleanings.

**See-through strainer pot lid**

For easy inspection and cleaning.

Model Number	Filter Area Sq. Ft.	Vertical Clearance*	Filter Diameter	Flow Rate GPM**	Turnover Capacity-Res. (Gallons)		
					8 hrs.	10 hrs.	12 hrs.
CC50	50	37"	15.5"	50	24,000	30,000	36,000
CC75	75	46"	15.5"	75	36,000	45,000	54,000
CC100	100	68"	15.5"	100	48,000	60,000	72,000
CC125	125	68"	15.5"	125	60,000	75,000	90,000
CC150	150	83"	15.5"	150	72,000	90,000	108,000
CC175	175	83"	15.5"	150	72,000	90,000	108,000
CC200	200	83"	15.5"	150	72,000	90,000	108,000

Flow rate and turnover capacity based on filter.

\*Clearance to remove filter module when sitting on base.

\*\*Maximum flow rate.



1620 Hawkins Ave | Sanford, NC 27330 | United States | 800.831.7133 | pentair.com

All indicated Pentair trademarks and logos are property of Pentair Inc. or its global affiliates in the U.S.A. and/or other countries. Third party registered and unregistered trademarks and logos are the property of their respective owners.

PI-211 2/20 ©2020 Pentair. All Rights Reserved

