

Manufacturing Quality Products Since 1891

INTERMATIC

AIR FORCE

AN EXTENSION OF TIME SWITCHES BY INTERMATIC

AN ARSENAL OF AIR FORCE


**NEW 24hr.
Electronic Timer**

**Dual Thermostat
Selector Switch**

**Low Voltage
Raceway**

**Gasketless
Design**

**Numerous
Knockouts on
Bottom, Back
and Sides**

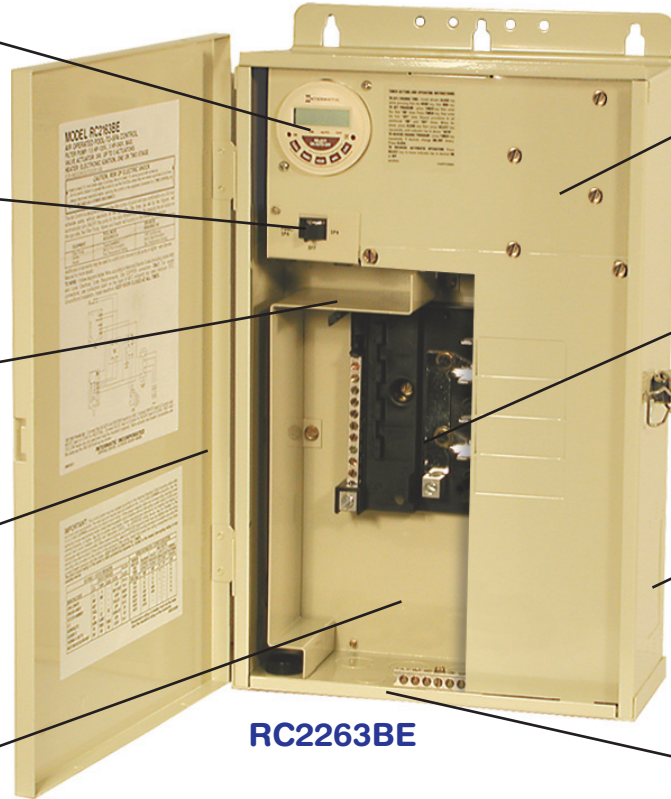

**Pump Relay
(3hp, 120/240V)**

**100 Amp
Breaker Buss**

**Rectangular
Knockout for GFCI
or Switching Device**

**Direct Underwater
Light Connection
(no J Box required)**

RC2263BE

For Pool-to-Spa and Spa only applications, all AIR FORCE models can operate a filter pump, up to three valve actuators and dual heater thermostats. In addition, the RC2263E/BE and RC2403RT can also operate a blower. Most models also come complete with two valve actuators, an air button and 75 ft. of air hose. See chart below for details.

With one touch the AIR FORCE unit automatically overrides the energy saving timer and turns on the pump, switches the valves from the pool/filter mode to the spa/water feature mode and switches the compatible dual thermostat on the heater/heat pump from the pre-set pool temperature to the pre-set spa temperature.

FEATURES AND BENEFITS

- Simple to Install and Operate
- Controls up to 75 ft. away from Equipment
- One Touch Convenience for Pool/Spa Combo or Water Feature Applications
- Modular Design for Serviceability
- Retro-Fits Existing Installations
- Direct Underwater Light Connection
- Built in Surge Suppression Enhances Longevity
- Control Equipment at a Remote Location via Wireless Radio Remote, Spring Wound Timer or Light Switch
- A Spring Wound Timer Increases Energy Savings and Reduces Maintenance Costs



RC2163E



RC2263BE

Specifications	RC2163E	RC2163FE	RC2263E	RC2403RT	RC2163BE	RC2263BE	RC2263BE
Voltage	120/240	120/240	120/240	120/240	120/240	120/240	120/240
Remote Command	1-AIR	Any Switch*	1-AIR	2-AIR	1-AIR	Any Switch*	1-AIR
Filter Pump	Timer Controlled in Pool Mode	Y	Y	Y	Y	Y	Y
	Single Speed Only (HP)	3 HP	3 HP	NA	3HP	3 HP	NA
	Single or Two-Speed (HP)	NA	NA	2 HP	NA	NA	2 HP
Heater Thermostat Control (Single or Dual)	Y	Y	Y	NO	Y	Y	Y
Number of Valve Actuator Connections	3	3	3	0	3	3	3
Heater Protection (Optional)	Y	NO	Y	NO	Y	NO	Y
Blower	NO	NO	Y	Y	NO	Y	Y
Independent Circuit (DPST 30A, 3HP-240V)	NO	NO	NO	Y	NO	NO	NO
Standard Enclosure (In)	12.9x10.9x4.3	12.9x10.9x4.3	12.9x10.9x4.3	12.9x10.9x4.3	16.8x10.9x4.3	16.8x10.9x4.3	16.8x10.9x4.3
Number of Breaker Space	NA	NA	NA	NA	8/16	8/16	8/16
Reference Picture	RC2163E	RC2163E	RC2163E	RC2163E	RC2263BE	RC2263BE	RC2263BE

* acceptable switching devices include RC600 Series wireless radio remote, spring wound timer, light switch, X10, etc.