



Formerly A. O. Smith Electrical Products Company

Replacement Parts & Motor Cross Reference Manual for Century Pool & Spa Motors 3996



Distribution Marketing
1325 Heil Quaker Blvd.
LaVergne, TN 37086
PH: 866-887-5216
FAX: 800-468-2062

centuryelectricmotor.com

© 2012 Regal-Beloit Corporation Bulletin 3996 7/2012

A Regal Brand


REGAL

Table of Contents

How to Identify the Replacement Part Number	3
(125267 - 164301)	4
(164302 - 165111)	5
(165112 - 165892)	6
(165893 - 173702)	7
(173763 - 177070)	8
(177073 - 177453)	9
(177454 - 177754)	10
(177760 - 177971)	11
(177972 - 181390)	12
(181429 - 182599)	13
(182600 - 182889)	14
(182895 - 184394)	15
(184395 - 184984)	16
(184985 - 186266)	17
(186267 - 186466)	18
(186467 - 186897)	19
(186898 - 187552)	20
(187553 - 193003)	21
(193004 - 194106)	22
56 Frame Two Speed: Toggle Switch Assembly, Microswitch & Mounting Bracket	23
Motor Replacement Parts Specifications	
Capacitors, Bearings, Thru Bolts	24
Century® Pool & Spa Motor Assembly Drawings	
56 Frame, Centurion® (Square Flange & C-Bracket)	25
56 Frame, Centurion® SE (Square Flange & C-Bracket)	26
48 Frame (Thru-Bolt)	27

How to Identify the Replacement Part Number for Century® Pool & Spa Motor

1. Identify the Motor Part Number on the nameplate. The sample nameplate to the right shows the location of the part number. Use only the middle six digits for motor part number identification.
Example: 8-164300-40

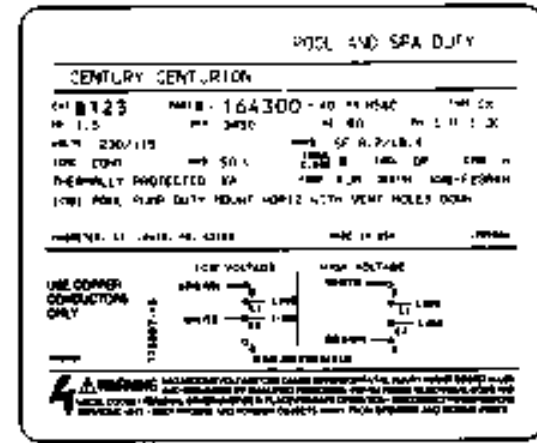

2. The sample table below describes the information available from replacement parts and motors list.

- A. Motor Part #:** Motor part numbers are listed in numerical order, ascending order.
- B. Drawing #:** Assembly drawings for most Century pool & spa motors are on pages 27 through 29.
- C. Replacement Part Name:** Replacement parts available for service repair are listed. When unsure of the replacement part name, refer to the assembly drawing for proper identification.
- D. Catalog Replacement #:** Suitable catalog replacement motors available from Authorized Distributors and Dealers of Century pool & spa motors.

														D
A	B	C										D		
Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
165124	2	2448		C70050MN		14311820	17960001	10000445	10000353	17948001	13769301	16285666		B809
165125	2	2448		C70050MN	C70025MN	14311820	17960001	10000445	10000353	17948001	13769301	16285666		B817
165126	2	2448		C70050MN	C70030MN	14311820	17960001	10000445	10000353	17948001	13769301	16285666		B818
165133	1	2444		C70030MN		13871101	17960101	10000445	10000353	17948001	10377501	16285675		B840
165180	6	2406	2548	C70010RG		17019501	16134501	10000353	10000353	17820301	16103804	16284898	10007463	BN34
165198	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769301	16285669		B661
165199	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769301	16285671		B841
165200	1	2448		C70050MN		13871101	17960001	10000445	10000353	17948001	13769301	16285675		B842
165201	1	2448		C70050MN		13871101	17960001	10000445	10000353	17948001	13769301	16285679		B843

3. Locate the motor part number and read across to the column with the replacement part name you required. The replacement part number listed is the part number you need to order your Century® replacement part. Replacement parts are available from Authorized Distributors and Dealers of Century® pool & spa motors. **Example: Motor Part # 165125, Run Capacitor Assembly: C70025MN, Replacement Motor: B817**

4. Century® pool & spa motors parts list begins on the following page. Thank you for choosing Century® pool & spa motor and replacement parts.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
125267			2509		C10216EN	17005206	10359603	10000445	10000353	14754150	13769301	16285643	10007447	B509
125268			2517		C10324EN	17005206	10359603	10000445	10000353	14754150	13769301	16285643	10007447	B647
125270			2520		C10400EN	17005206	10359603	10000445	10000353	14754150	13769301	16285646	10007447	B784
125272			2522		C10540EN	17005206	10359603	10000445	10000353	14754150	13769301	16285652	10007447	B785
151767						17005206	17960001	10000445	10000353	17927501	13769301	16285646		H281
151768						17005206	17960001	10000445	10000353	17927501	13769301	16285646		H282
151769						17005206	17960001	10000445	10000353	17927501	13769301	16285652		H450
151770						17005206	17960001	10000445	10000353	17927501	13769301	16285652		H451
151771						17005206	17960001	10000445	10000353	17927501	13769301	16285652		H513
151772						17005206	17960001	10000445	10000353	17927501	13769301	16285652		H514
151773						17005206	17960001	10000445	10000353	17927501	13769301	16285656		H616
151774						17005206	17960001	10000445	10000353	17927501	13769301	16285656		H617
151775						17005206	17960001	10000445	10000353	17927501	13769301	16285660		H704
151776						17005206	17960001	10000445	10000353	17927501	13769301	16285660		H705
151777						17005206	17960001	10000445	10000353	17927501	13769301	16285660		H740
151778						17005206	17960001	10000445	10000353	17927501	13769301	16285660		H741
151965	2	2448		C70050MN		17005206	17960001	10000445	10000353	17948001	13769301	16285666		B772
151966	2	2448		C70050MN		17005206	17960001	10000445	10000353	17948001	13769301	16285666		B773
151967	2	2448		C70050MN		17005206	17960001	10000445	10000353	17948001	13769301	16285666		B774
151968	2	2448		C70050MN		17005206	17960001	10000445	10000353	17948001	13769301	16285666		B775
152595	6					17019501	17907701	10000353	10000353	15768150	13903001	16284895		BN32
152596	6		2509		C10124EN	17019501	17907701	10000353	10000353	15768150	13903001	16284853	10007447	BN33
158367	2	2443		C70025MN		17005206	17960001	10000445	10000353	17948001	13769301	16285656		B108
158368	2	2445		C70035MN		17005206	17960001	10000445	10000353	17948001	13769301	16285665		B110
158374	2	2443		C70025MN		17005206	17960001	10000445	10000353	17948001	13769301	16285656		B109
158375	2	2445		C70035MN		17005206	17960001	10000445	10000353	17948001	13769301	16285665		B111
158739			2509		C10124EN	14311820	10359841	10000445	10000353	11523001	13769301	16285652	10007463	—
158760			2516		C10270EN	14311820	10359841	10000445	10000353	11523101	13769301	16285660	10007463	—
158842			2513		C10189EN	14311820	17960001	10000445	10000353	15768150	13769301	16285660	10007446	—
158897			2509		C10124EN	14311820	10359841	10000445	10000353	11523001	13769301	16285652	10007463	—

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
158984			2508		C10108EN	14311820	17960001	10000445	10000353	15768101	13769301	16285646	10007446	
159786	2	2440	2514	C70015MN	C10216EN	17005206	17960001	10000445	10000353	13980750	13769301	16285652	10007447	B108
159862						17019501	16161701	10000379	10000379	15768101	13903001	16284895	10007447	
159964						17019501	16161701	10000379	10000379	15768101	13903001	16284853	10007447	
159965						17019501	16161701	10000379	10000379	15768101	13903001	16284846	10007447	
159966						17019501	16161701	10000379	10000379	15768101	13903001	16284895	10007447	
159987	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285656		B124
159988	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285656		B130
159989	2	2445		C70035MN		14311820	17960001	10000445	10000353	17948001	13769301	16285666		B125
159990	2	2445		C70035MN		14311820	17960001	10000445	10000353	17948001	13769301	16285666		B131
164004	6		2508		C10108EN	17019501	16134501	10000353	10000353	17820301	16103804	16284892	10007463	
164007			2509		C10124EN	17019501	16134501	10000379	10000379	17820301	16103804	16284848	10007463	
164135	2	2443		C70025MN		10392002	17960001	10000353	10000353	17948001	13769301	16285656		B231
164297	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285646		B120
164298	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285646		B121
164299	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285652		B122
164300	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285660		B123
164301	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285646		B126
164302	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285646		B127
164303	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285652		B128
164304	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285660		B129
164355	2	2443		C70025MN		17005206	17960001	10000445	10000353	17948001	13769301	16285646		B132
164356	2	2443		C70025MN		17005206	17960001	10000445	10000353	17948001	13769301	16285646		B133
164357	2	2443		C70025MN		17005206	17960001	10000445	10000353	17948001	13769301	16285652		B134
164358	2	2443		C70025MN		17005206	17960001	10000445	10000353	17948001	13769301	16285660		B135
164359	2	2443		C70025MN		17005206	17960001	10000445	10000353	17948001	13769301	16285646		B136
164360	2	2443		C70025MN		17005206	17960001	10000445	10000353	17948001	13769301	16285646		B137
164361	2	2443		C70025MN		17005206	17960001	10000445	10000353	17948001	13769301	16285652		B138
164362	2	2443		C70025MN		17005206	17960001	10000445	10000353	17948001	13769301	16285660		B139
164427	6					17019501	16161701	10000353	10000353	15768150	16103801	16284853	10007447	

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
164437	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285646		B120
164438	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285646		B121
164439	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285652		B122
164440	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285660		B123
164441	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285656		B124
164452	2	2445		C70035MN		14311820	10359803	10000445	10000353	17948001	13769301	16285666		B125
164521				17586325	C70025MN	14311820	17960001	10000445	10000353	17948001	13769301	16285646		
164526	6					17019501	16161701	10000353	10000353	15768150	16103801	16284895	10007447	
164564	2	2443		C70025MN		10392002	10359803	10000353	10000353	17948001	13769301	16285646		B127
164565	2	2443		C70025MN		10392002	10359803	10000353	10000353	17948001	13769301	16285652		B128
164566	2	2443		C70025MN		10392002	10359803	10000353	10000353	17948001	13769301	16285660		B129
164567	2	2443		C70025MN		10392002	10359803	10000353	10000353	17948001	13769301	16285656		B130
164613	6		2508		C10108EN	17019501	16134501	10000353	10000353	17820301	16103804	16284893	10007463	BN36
164651				17586325	C70025MN	17018301	17960101	10000379	10000379	17948001	10377501	16285656		
164652				17586330	C70030MN	17018301	17960101	10000379	10000379	17948001	10377501	16285656		B623
164653				17586330	C70030MN	17018301	17960101	10000379	10000379	17948001	10377501	16285662		
164654				17586330	C70030MN	17018301	17960101	10000379	10000379	17948001	10377501	16285670		B747
164655	1	2444		C70030MN		13871101	17960101	10000445	10000353	17948001	10377501	16285675		B748
164716	2	2448		C70050MN		17005206	17960001	10000445	10000353	17948001	13769301	16285652		B631
164717	2	2448		C70050MN		17005206	17960001	10000445	10000353	17948001	13769301	16285656		B723
164718	2	2448		C70050MN		17005206	17960001	10000445	10000353	17948001	13769301	16285660		B750
164719	2	2448		C70050MN		17005206	17960001	10000445	10000353	17948001	13769301	16285652		B632
164720	2	2448		C70050MN		17005206	17960001	10000445	10000353	17948001	13769301	16285656		B724
164721	2	2448		C70050MN		17005206	17960001	10000445	10000353	17948001	13769301	16285660		B751
164727	2	2444		C70030MN		14311820	17960001	10000445	10000353	17948001	13769301	16285666		B835
164728	2	2444		C70030MN		14311820	17960001	10000445	10000353	17948001	13769301	16285666		B836
164832			2513		C10189EN	14311820	17960001	10000445	10000353	13980901	13769301	16285660	10007446	—
164903						14385502	10359603	10000415	10000379	17927501	10377501	16285678		—
164904						14311825	17960001	10000415	10000353	17927501	13769301	16285660		—
164950	6					17019501	17907801	10000379	10000379	15768101	13903001	16284899	10007447	BN25

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
164952	6					17019501	17907801	10000379	10000379	15768101	13903001	16284898	10007447	BN24
165019	2			17586325	C70025MN	14311820	10359803	10000445	10000353	17948001	13769301	16285660		B809
165020	2			17586330	C70030MN	14311820	10359803	10000445	10000353	17948001	13769301	16285652		B654
165111	2	2443		C70025MN		10392002	10359803	10000353	10000353	17948001	13769301	16285646		B127
165112	2	2443		C70025MN		10392002	10359803	10000353	10000353	17948001	13769301	16285652		B128
165113	2	2443		C70025MN		10392002	10359803	10000353	10000353	17948001	13769301	16285660		B129
165114	2	2443		C70025MN		10392002	10359803	10000353	10000353	17948001	13769301	16285656		B130
165115	2	2445		C70035MN		10392002	10359803	10000353	10000353	17948001	13769301	16285666		B131
165117	2	2448		C70050MN		14311820	17960001	10000445	10000353	17948001	13769301	16285652		B634
165118	2	2448		C70050MN		14311820	17960001	10000445	10000353	17948001	13769301	16285652		B638
165119	2	2448		C70050MN		14311820	17960001	10000445	10000353	17948001	13769301	16285656		B653
165120	2	2448		C70050MN		14311820	17960001	10000445	10000353	17948001	13769301	16285656		B654
165121	2	2448		C70050MN		14311820	17960001	10000445	10000353	17948001	13769301	16285660		B795
165122	2	2448		C70050MN		14311820	17960001	10000445	10000353	17948001	13769301	16285660		B796
165123	2	2448		C70050MN		14311820	17960001	10000445	10000353	17948001	13769301	16285666		B808
165124	2	2448		C70050MN		14311820	17960001	10000445	10000353	17948001	13769301	16285666		B809
165125	2	2448		C70050MN		14311820	17960001	10000445	10000353	17948001	13769301	16285666		B817
165126	2	2448		C70050MN		14311820	17960001	10000445	10000353	17948001	13769301	16285666		B818
165133	1	2444		C70030MN		13871101	17960101	10000445	10000353	17948001	10377501	16285675		B840
165180	6	2406	2548	C70010RG		17019501	16134501	10000353	10000353	17820301	16103804	16284898	10007463	BN34
165198	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769301	16285669		B661
165199	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769301	16285671		B841
165200	1	2448		C70050MN		13871101	17960001	10000445	10000353	17948001	13769301	16285675		B842
165201	1	2448		C70050MN		13871101	17960001	10000445	10000353	17948001	13769301	16285679		B843
165202	1	2448		C70050MN		13871101	17960001	10000445	10000353	17948001	13769301	16285679		B844
165267	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769301	16285663		B845
165268		2443		C70025MN		17018301	17960101	10000353	10000353	17948001	10377501	16285656		B797
165297	2	2448		C70050MN		14311820	17960001	10000445	10000353	17948001	13769301	16285648		B656
165298	2	2448		C70050MN		14311820	17960001	10000445	10000353	17948001	13769301	16285648		B657
165328		2443		C70025MN		17051101	17960101	10000379	10000379	17948001	10377501	16285648		B662

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
165361	6					17019501	16134501	10000353	10000353	17590001	16103804	16284892	10007473	BN36
165362	6		2508		C10108EN	17019501	16134501	10000353	10000353	17820201	16103804	16284893	10007473	BN37
165363						17018301	17960001	10000353	10000353	17927501	13769301	16285661		H491
165364						17018301	17960001	10000353	10000353	17927501	13769301	16285666		H492
165365						17018301	17960001	10000353	10000353	17927501	13769301	16285669		H635
165366						13871101	17960001	10000445	10000353	17927501	13769301	16285671		H636
165367						13871101	17960001	10000445	10000353	17927501	13769301	16285675		H637
165369	6					17019501	13865359	10000353	10000353	13980750	16103801	16284896		BN25
165388	2	2445		C70035MN		14311820	17960001	10000445	10000353	17948001	13769301	16285666		B131
165434	6					17019501	16161701	10000353	10000353	15768150	16103801	16284846	10007447	—
165440						13871101	17960001	10000445	10000353	17927501	13769301	16285675		H755
165527	6		2508		C10108EN	17019501	16134501	10000353	10000353	17820201	16103804	16284862	10007473	BN37
165744	6		2508		C10108EN	17019501	17081601	10000353	10000353	17820201	16103804	16284894	10007473	BN50
165789	6		2508		C10108EN	17019501	16134501	10000379	10000379	17820201	16103804	16284899	10007463	BN38
165845						17019501	16161701	10000379	10000379	15768101	13903001	16284895	10007447	—
165846						17019501	16161701	10000379	10000379	15768101	13903001	16284853	10007447	—
165883						13871101	18308201	10000445	10000353	15703250	15703101	16285675		H755
165887						13871101	18308201	10000445	10000353	15703250	15703101	16285675		H637
165888	1	2448		C70050EN		17018301	10359803	10000353	10000353	17948001	13769301	16285671		B841
165889	1	2448		C70050EN		13871101	10359803	10000445	10000353	17948001	13769301	16285675		B842
165890	1	2448		C70050EN		17018301	10359803	10000353	10000353	17948001	13769301	16285669		B661
165891	1	2448		C70050EN		13871101	10359803	10000445	10000353	17948001	13769301	16285679		B843
165892	1	2448		C70050EN		13871101	10359803	10000445	10000353	17948001	13769301	16285679		B844
165893						17018301	18308201	10000353	10000353	15703250	15703101	16285666		H492
165894						17018301	18308201	10000353	10000353	15703250	15703101	16285669		H635
165895						17018301	18308201	10000353	10000353	15703250	15703101	16285671		H636
165903	1	2444		C70030MN		17018301	10359803	10000353	10000353	17948001	13769301	16285662		B847
165904	1	2443		C70025MN		17018301	10359803	10000353	10000353	17948001	13769301	16285662		B846
165965	6					17019501	17907801	10000379	10000379	15768101	13903001	16284895	10007447	BN24
165984	1	2443		C70025MN		17018301	18308201	10000353	10000353	14710901 15772301	15703101	16285674	10007473	B983

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
165985	1	2445		C70035MN		17018301	18308201	10000353	10000353	14710901 15772301	15703101	16285678	10007473	B984
168086	6	2405	2545	C70007MG	C20053EN	17019501	16134501	10000353	10000353	17820301	16103804	16284897	10007467	BN53
168087	6		2544		C20043EN	17019501	16134501	10000353	10000353	17820301	16103804	16284892	10007467	BN52
168096	2	2443		C70025MN		10392002	10359803	10000353	10000353	17948001	13769301	16285660		B130
168097	2	2443		C70025MN		10392002	10359803	10000353	10000353	17948001	13769301	16285646		B127
168098	2	2443		C70025MN		10392002	10359803	10000353	10000353	17948001	13769301	16285646		B128
168099	2	2443		C70025MN		10392002	10359803	10000353	10000353	17948001	13769301	16285652		B129
168195			2508			17019501	16723401	10000379	10000379	17820301	10008601	16284893	10007463	—
168276	2	2444		C70030MN		14311820	17960001	10000445	10000353	17948001	13769301	16285672		B115
168345	1	2444		C70030MN		13871101	10359803	10000445	10000353	17948001	13769301	16285674		B849
168451	1	2443		C70025MN		17018301	10359803	10000353	10000353	17948001	13769301	16285662		B846
168452	1	2444		C70030MN		17018301	10359803	10000353	10000353	17948001	13769301	16285662		B847
168453	1	2444		C70030MN		17018301	10359803	10000353	10000353	17948001	13769301	16285664		B848
168454	1	2444		C70030MN		13871101	17960001	10000445	10000353	17948001	13769301	16285679		B858
168455	1	2445		C70035MN		13871101	17960001	10000445	10000353	17948001	13769301	16285679		B844
168460						13871101	10359803	10000445	10000353	17927501	13769301	16285675		H755
168477	6					17019501	16161701	10000353	10000353	15768150	16103801	16284846		BN23
168519		2445		C70035MN		14311825	17960001	10000415	10000353	17948001	13769301	16285666		—
168572		2445	2514	C70035MN	C70035MN	14311825	17960001	10000415	10000353	17948001	13769301	16285672		—
168625		2443		C70025MN		14311820	10359803	10000445	10000353	17948001	13769301	16285646		—
168664	6		2507		C10088EN	17019501	16161701	10000379	10000379	15768101	16103801	16284853	10007446	BN35
168768	6		2508		C10108EN	17019501	17081601	10000379	10000379	17820301	10008601	16284893	10007463	BN37
168786	1	2448		C70050MN		13871101	10359803	10000445	10000353	17948001	13769301	16285679		B748
168787	1	2448		C70050MN		13871101	10359803	10000445	10000353	17948001	13769301	16285675		B849
168805	6		2508		C10108EN	17019501	17271801	10000379	10000379	17820301	10008601	16284898	10007463	BN34
168859		2443		C70025MN		17051101	17960101	10000353	10000353	17948001	10377501	16285648		B663
168887	1	2448		C70050MN		17018301	10359803	10000353	10000353	17948001	13769301	16285671		B848
168888	1	2448		C70050MN		13871101	10359803	10000445	10000353	17948001	13769301	16285679		B844
168919	1	2448		C70050MN		17018301	10359803	10000353	10000353	17948001	13769301	16285669		B847

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
168970	6					17019501	16161701	10000353	10000353	15768150	16103801	16284853		BN25
168971	6		2508		C10108EN	17019501	16134501	10000353	10000353	17820301	16103804	16284893	10007463	BN37
168995			2508		C10108EN	17019501	17271801	10000379	10000379	17820301	10008601	16284898	10007463	—
173118	6					17019501	13865359	10000353	10000353	13980750	16103801	16284853		BN24
173135	6					17019501	17907801	10000353	10000353	15768150	16103801	16284853		BN24
173289			2513		C10089EN	16200101	10359603	10000379	10000379	15768101	10377501	16285642	10007446	—
173315	6					17019501	17907801	10000353	10000353	15768150	16103801	16284896		BN25
173316	6					17019501	13865359	10000353	10000353	13980750	16103801	16284895		BN23
173415	6		2508		C10108EN	17019501	16134501	10000353	10000353	17820201	16103804	16284893	10007473	BN36
173416	6		2508		C10108EN	17019501	16134501	10000353	10000353	17820201	16103804	16284893	10007473	BN37
173632	6		2508		C10108EN	17019501	16134501	10000353	10000353	17820201	16103804	16284862	10007473	BN37
173702		2445		C70035MN		17520701	17960001	10000445	10000353	17948001	13769301	16285685		B116
173763			2509		C25819EN	17276301	17960001	10000353	10000353	15768101	13769301	16285644	10007446	—
173792			2516		C25270EN	17276301	17960001	10000353	10000353	15768150	13769301	16285656	10007446	B129
173840	2		2509		C10124EN	17276301	17960001	10000353	10000353	15768150	13769301	16285653	10007446	B625
173859	2		2509		C25189EN	17276301	17960001	10000353	10000353	17526601	13769301	16285650	10007473	B975
173942	6					17019501	16161701	10000353	10000353	15768150	16103801	16284853		BN35
176193						17019501	16161701	10000379	10000379	15768101	16103801	16284846	10007447	—
176379	6	2406	2548	C70010RG		17019501	16134501	10000353	10000353	17820301	16103804	16284898	10007463	BN34
176505	6					17019501	17907801	10000353	10000353	15768150	16103801	16284899		BN25
176506	6					17019501	17907801	10000353	10000353	15768150	16103801	16284899		BN23
176507	6					17019501	17907801	10000353	10000353	15768150	16103801	16284899		BN24
176592	6		2509		C10124EN	17019501	17907801	10000379	10000379	15768101	16103801	16284896	10007447	BN32
176614		2444		C70030MN		16688702	10359803	10000415	10000353	17948001	13769301	16285656		—
176615		2443		C70025MN		16688702	10359803	10000415	10000353	17948001	13769301	16285660		—
176698	6		2509		C10124EN	17019501	17907801	10000379	10000379	15768101	16103801	16284866	10007447	BN39
176816	6		2507		C10088EN	17019501	17907801	10000353	10000353	15768150	16103801	16284899	10007446	BN35
176830	2		2508		C10108EN	17276301	10359803	10000353	10000353	15768101	13769301	16285646	10007446	B625
176869		2448		C70050MN		16688702	10359803	10000415	10000353	17948001	13769301	16285666		—
176894	1	2445		C70035MN		13871102	18308204	10000445	10000353	15772301	15703101	16285680	10007473	B984

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
177018	2	2443		C70025MN		17276301	10359803	10000353	10000353	17948001	13769301	16285649		B127
177019	2	2443		C70025MN		17276301	10359803	10000353	10000353	17948001	13769301	16285649		B128
177020	2	2443		C70025MN		17276301	10359803	10000353	10000353	17948001	13769301	16285649		B129
177021	2	2443		C70025MN		17276301	10359803	10000353	10000353	17948001	13769301	16285659		B130
177022	2	2443		C70025MN		17276301	10359803	10000353	10000353	17948001	13769301	16285655		B130
177023	2	2445		C70035MN		17276301	17960001	10000353	10000353	17948001	13769301	16285665		B131
177024	2	2443		C70025MN		17276301	10359803	10000353	10000353	17948001	13769301	16285649		B127
177025	2	2443		C70025MN		17276301	10359803	10000353	10000353	17948001	13769301	16285649		B128
177026	2	2443		C70025MN		17276301	10359803	10000353	10000353	17948001	13769301	16285659		B129
177027	2	2443		C70025MN		17276301	10359803	10000353	10000353	17948001	13769301	16285655		B130
177028	2	2445		C70035MN		17276301	10359803	10000353	10000353	17948001	13769301	16285665		B131
177032	2	2443		C70025MN		17276301	10359803	10000353	10000353	17948001	13769301	16285659		B129
177033	2	2443		C70025MN		17276301	10359803	10000353	10000353	17948001	13769301	16285655		B130
177034	2	2445		C70035MN		17276301	17960001	10000353	10000353	17948001	13769301	16285665		B131
177035						17276301	17960001	10000353	10000353	17927501	13769301	16285659		H741
177055		2443		C70025MN		14311803	17960201	10000445	10000353	15772301	17590401	16285652	10007473	B970
177056		2443		C70025MN		14311803	17960201	10000445	10000353	15772301	17590401	16285652	10007473	B971
177057		2443		C70025MN		14311803	17960201	10000445	10000353	15772301	17590401	16285652	10007473	B972
177058		2443		C70025MN		14311803	17960201	10000445	10000353	15772301	17590401	16285652	10007473	B973
177059		2443		C70025MN		14311803	17960201	10000445	10000353	15772301	17590401	16285652	10007473	B974
177060		2443		C70025MN		14311803	17960201	10000445	10000353	15772301	17590401	16285652	10007473	B975
177061		2443		C70025MN		14311803	17960201	10000445	10000353	15772301	17590401	16285656	10007473	B976
177062		2443		C70025MN		14311803	17960201	10000445	10000353	15772301	17590401	16285656	10007473	B977
177063		2443		C70025MN		14311803	17960201	10000445	10000353	15772301	17590401	16285660	10007473	B978
177064		2443		C70025MN		14311803	17960201	10000445	10000353	15772301	17590401	16285660	10007473	B979
177065		2443		C70025MN		17018301	17960201	10000353	10000353	15772301	17590401	16285669	10007473	B980
177066		2443		C70025MN		17018301	17960201	10000353	10000353	15772301	17590401	16285664	10007473	B981
177067		2444		C70030MN		17018301	17960201	10000353	10000353	15772301	17590401	16285671	10007473	B982
177068		2443		C70025MN		13871101	17960201	10000445	10000353	15772301	17590401	16285674	10007473	B983
177069		2445		C70035MN		13871101	17960201	10000445	10000353	15772301	17590401	16285678	10007473	B984

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
177070		2443		C70025MN		13871101	17960201	10000445	10000353	15772301	17590401	16285674	10007473	B985
177073	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285652		B128
177074	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285660		B129
177075	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285656		B124
177078	1	2443		C70025MN		17018301	17960001	10000353	10000353	17948001	13769301	16285662		B846
177079	1	2444		C70030MN		17018301	17960001	10000353	10000353	17948001	13769301	16285662		B847
177080	1	2444		C70030MN		17018301	17960001	10000353	10000353	17948001	13769301	16285665		B848
177081	1	175863MN		C70030MN		13871101	17960001	10000445	10000353	17948001	13769301	16285679		B858
177100	2	2443		C70025MN		17276301	17960201	10000353	10000353	15772301	15703101	16285649	10007473	B975
177103	2	2443		C70025MN		17276301	17960201	10000353	10000353	15772301	15703101	16285651	10007473	B977
177105	2	2443		C70025MN		17276301	17960201	10000353	10000353	15772301	17590403	16285651	10007473	B975
177107	2	2443		C70025MN		17276301	17960201	10000353	10000353	15772301	15703101	16285659	10007473	B979
177111	2	2443		C70025MN		17276301	17960201	10000353	10000353	15772301	15703101	16285659	10007473	B979
177112	2	2443		C70025MN		17276301	17960201	10000353	10000353	15772301	17590403	16285659	10007473	B979
177115	1	2443		C70025MN		13871102	17960201	10000445	10000353	15772301	15703101	16285674	10007473	B983
177116	1	2448		C7005MN		17018301	17960001	10000353	10000353	17948001	13769301	16285679		B844
177117	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769302	16285679		B843
177118	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769302	16285675		B842
177119	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769302	16285671		B841
177120	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769302	16285669		B661
177121	1	2443		C70025MN		17018301	17960201	10000353	10000353	15772301	15703101	16285674	10007473	B983
177122	1	2445		C70035MN		17018301	17960201	10000353	10000353	14710901 15772301	15703101	16285678	10007473	B984
177132	1	2443		C70025MN		17818304	17960201	10000353	10000353	15772301	15703101	16285664	10007473	B981
177138	2	2444		C70030MN		17276301	17960001	10000353	10000353	17948001	13769301	16285653		B796
177143		2443		C70025MN		17018301	17960201	10000353	10000353	15772301	17590401	16285664	10007473	B981
177144		2444		C70030MN		17018301	17960201	10000353	10000353	15772301	17590401	16285671	10007473	B982
177145		2443		C70025MN		13871101	17960201	10000445	10000353	15772301	17590401	16285674	10007473	B983
177146		2445		C70035MN		13871101	17960201	10000445	10000353	15772301	17590401	16285678	10007473	B984
177170	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285646		B228SE

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
177172	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285660		B230SE
177174	2	2443		C70025MN		14311803	17960201	10000445	10000353	15772301	17590401	16285652	10007473	B971
177192	6		2508		C10108EN	17019501	16134501	10000353	10000353	17820201	16103804	16284893	10007473	BN37
177193	6					17019501	16161701	10000353	10000353	15768150	16103804	16284853		BN35
177214	1	2443		C70025MN		17018301	17960001	10000353	10000353	17948001	13769301	16285662		B852
177215	1	2444		C70030MN		17018301	17960001	10000353	10000353	17948001	13769301	16285662		B853
177216	1	2444		C70030MN		17018301	17960001	10000353	10000353	17948001	13769301	16285664		B854
177217	1	2444		C70030MN		13871101	17960001	10000445	10000353	17948001	13769301	16285679		B859
177223	1	2443		C70025MN		17018301	17960001	10000353	10000353	17948001	13769301	16285662		B856
177351	1	2445		C70035MN		13871102	18308204	10000445	10000353	15772301	15703101	16285678	10007473	B984
177375		2443		C70025MN		17051101	17960001	10000353	10000353	17948001	13769301	16285654		B662
177384	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769301	16285662		B845
177386	6					17019501	16161701	10000379	10000379	15768101	16103801	16284853	10007447	BN25
177449	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769302	16285668		B661
177450	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769302	16285670		B841
177451	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769302	16285674		B842
177452	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769302	16285678		B843
177453	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769302	16285678		B844
177459	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285648		B127
177460	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285652		B128
177461	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285660		B129
177463	2	2445		C70035MN		14311820	17960001	10000445	10000353	17948001	13769301	16285666		B131
177468	2	2443		C70025MN		17005206	17960001	10000445	10000353	17948001	13769301	16285646		B120
177469	2	2443		C70025MN		17005206	17960001	10000445	10000353	17948001	13769301	16285646		B121
177470	2	2443		C70025MN		17005206	17960001	10000445	10000353	17948001	13769301	16285652		B122
177471	2	2443		C70025MN		17005206	17960001	10000445	10000353	17948001	13769301	16285660		B123
177472	2	2443		C70025MN		17005206	17960001	10000445	10000353	17948001	13769301	16285656		B124
177473	2	2445		C70035MN		17005206	17960001	10000445	10000353	17948001	13769301	16285666		B125
177474	1	2444		C70030MN		17018301	17960001	10000353	10000353	17948001	13769301	16285662		B847
177475	1	2444		C70030MN		17018301	17960001	10000353	10000353	17948001	13769301	16285665		B848

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
177476	1	2444		C70030MN		13871101	17960001	10000445	10000353	17948001	13769301	16285679		B858
177477	1	2448		C70050MN		13871101	17960001	10000445	10000353	17948001	13769301	16286378		B849
177483	2	2443		C70025MN		17276301	10359803	10000353	10000353	17948001	13769301	16285649		B128
177499	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285646		B127
177500	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285646		B128
177501	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285652		B129
177502	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285660		B836
177503	2	2443		C70025MN		14311820	17960001	10000445	10000353	17948001	13769301	16285656		B131
177583			2509		C10124EN	17276301	10359603	10000379	10000379	15768101	10377501	16285651	10007447	—
177601	5					17019501	16161701	10000379	10000379	15768101	16103801	16284853	10007447	BN35
177612	5					17019501	17870201	10000353	10000353	15768150	17870601	16284847	10007447	BN23
177613	5					17019501	17870201	10000353	10000353	15768150	17870601	16284847	10007447	BN24
177614	5					17019501	17870201	10000353	10000353	15768150	17870601	16284851	10007447	BN25
177615	5		2507			17019501	17870201	10000353	10000353	15768150	17870601	16284851	10007446	BN35
177631	1	2444		C70030MN		17818304	17960201	10000353	10000353	15772301	15703101	16285671	10007473	B982
177702						17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	—
177706	5					17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	BN23
177707	5					17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	BN23
177713	5					17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	BN31
177714						17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	—
177715						17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	—
177719	5					17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	BN24
177727						17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	—
177733	5					17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	BN24
177744	5					17019501	17870201	10000353	10000353	15768150	17870601	16284847	10007447	BN32
177745						17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	—
177746	5					17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	BN24
177748	5					17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007447	BN25
177754						17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007447	—
177760	5					17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007447	BN25

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
177767	5		2509			17019501	17870201	10000353	10000353	15768150	17870601	16284851	10007447	BN33
177768						17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007447	—
177769	5					17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	BN25
177773	5		2509			17019501	17870201	10000379	10000379	15768101	17870601	16284857	10007447	BN39
177774			2507			17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007446	—
177777	5		2507			17019501	17870201	10000353	10000353	15768150	17870601	16284851	10007446	BN35
177778	5		2508			17019501	17870201	10000379	10000379	15768101	17870601	16284857	10007446	BN40
177781	5					17019501	17870201	10000353	10000353	17909101	17870601	16284851	10007473	BN36
177782	5		2508			17019501	17870201	10000353	10000353	17909101	17870601	16284851	10007473	BN37
177783	5		2545			17019501	17870201	10000353	10000353	17909101	17870601	16284857	10007473	BN34
177784	5		2508			17019501	17870201	10000353	10000353	17909101	17870601	16284857	10007473	BN38
177803	5		2508			17019501	17870201	10000379	10000379	17909101	17870601	16284857	10007473	BN50
177804	5	2443	2508	C70025MN		17019501	17870201	10000379	10000379	17909101	17870601	16284857	10007473	BN60
177842	1	2443		C70025MN		17018301	10359603	10000353	10000353	15788950	10377501	16285658		B852
177865	5		2545			17019501	17870201	10000379	10000379	17909101	17870601	16284851	10007473	BN34
177892	5					17019501	17870201	10000353	10000353	15768150	17870601	16284843		BN23
177893	5					17019501	17870201	10000353	10000353	15768150	17870601	16284843	10007447	BN24
177894	5					17019501	17870201	10000353	10000353	15768150	17870601	16284847	10007447	BN25
177895	5					17019501	17870201	10000353	10000353	15768150	17870601	16284851	10007447	BV35
177896	1	2444		C70030MN		13871101	17960001	10000445	10000353	17948001	13769301	16285671		B849
177897	1	2444		C70030MN		13871101	17960001	10000445	10000353	17948001	13769301	16285671		B855
177917		2443		C70025MN		17051101	17960101	10000353	10000353	17948001	10377501	16285651		B687
177918		2443		C70025MN		17051101	17960101	10000353	10000353	17948001	10377501	16285660		B688
177919		2444		C70030MN		17051101	17960101	10000353	10000353	17948001	10377501	16285664		B689
177931	5					17019501	17870201	10000379	10000379	13980702	17870601	16284847	10007447	BN35
177932						17019501	17870201	10000379	10000379	13980702	17870601	16284843	10007447	—
177933						17019501	17870201	10000379	10000379	13980702	17870601	16284843	10007447	—
177937			2507			U7019501	U7870201	U0000379	U0000379	U5768101	U7870601	U6284851	U0007446	—
177938	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769301	16285663		B862
177939	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769301	16285669		B863

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
177940	1	2448		C70050MN		17018301	17960001	10000353	10000353	17948001	13769301	16285671		B864
177941	1	2448		C70050MN		13871101	17960001	10000445	10000353	17948001	13769301	16285675		B865
177942	1	2448		C70050MN		13871101	17960001	10000445	10000353	17948001	13769301	16285679		B866
177947	3	2443				17276301	17540101	10000353	10000353	17948001	17540201	16285650		B657
177948	3	2444				17276301	17540101	10000353	10000353	17948001	17540201	16285650		B638
177949	3	2444				17276301	17540101	10000353	10000353	17948001	17540201	16285654		B654
177950	3	2444				17276301	17540101	10000353	10000353	17948001	17540201	16285662		B796
177951	3	2444				17276301	17540101	10000353	10000353	17948001	17540201	16285662		B809
177952	3	2445				17276301	17540101	10000353	10000353	17948001	17540201	16285670		B818
177953	5					17019501	17870201	10000353	10000353	15768150	17870601	16284843		BN23
177954	5					17019501	17870201	10000353	10000353	15768150	17870601	16284843		BN24
177955	5					17019501	17870201	10000353	10000353	15768150	17870601	16284847		BN25
177960	5					17019501	17870401	10000379		15768101	17870601	16284843	10007447	BN24
177961	5					17019501	17870401	10000379		15768101	17870601	16284847	10007447	BN25
177969	4	2443				17018301	17540101	10000353	10000353	17948001	17540201	16285665		B856
177970	4	2443				17018301	17540101	10000353	10000353	17948001	17540201	16285665		B852
177971	4	2444				17018301	17540101	10000353	10000353	17948001	17540201	16285665		B853
177972	4	2444				17018301	17540101	10000353	10000353	17948001	17540201	16285665		B854
177974	4	2444				13871101	17540101	10000445	10000353	17948001	17540201	16285676		B840
177975	4	2448		C70050MN		17018301	17540101	10000353	10000353	17948001	17540201	16285665		B862SE
177976	4	2448		C70050MN		17018301	17540101	10000353	10000353	17948001	17540201	16285665		B863SE
177977	4	2448		C70050MN		17018301	17540101	10000353	10000353	17948001	17540201	16285669		B864SE
177978	4	2448		C70050MN		13871101	17540101	10000445	10000353	17948001	17540201	16285676		B865SE
177979	4	2448		C70050MN		13871101	17540101	10000445	10000353	17948001	17540201	16285676		B866SE
177980	3	2443				14311820	17540101	10000445	10000353	17948001	17540201	16285648		B227SE
177981	3	2443				14311820	17540101	10000445	10000353	17948001	17540201	16285648		B228SE
177982	3	2443				14311820	17540101	10000445	10000353	17948001	17540201	16285648		B229SE
177983	3	2443				14311820	17540101	10000445	10000353	17948001	17540201	16285657		B230SE
177984	3	2443				14311820	17540101	10000445	10000353	17948001	17540201	16285657		B231SE
181025						17520701	18335701	10000445	10000379	18354701	15703101	16285683		—

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
181069	6		2508		Y10108EN	U7019501	U6161701	U0000379	U0000379	U5768101	U6103801	U6284897	U0007446	BN40
181080						17019501	17870201	10000379	10000379	13480702	17870601	16284843	10007447	—
181081						17019501	17870201	10000379	10000379	13480702	17870601	16284843	10007447	—
181093	2	2443		C70025MN		17276301	17960201	10000353	10000353	14710901 15772301	15703101	16285655	10007473	B975
181094	2	2445		C70035MN		17276301	17960201	10000353	10000353	14710901 15772301	15703101	16285655	10007473	B979
181095	2	2443		C70025MN		17276301	10359803	10000353	10000353	17948001	13769301	16285649		B657
181096	2	2444		C70030MN		17276301	10359803	10000353	10000353	17948001	13769301	16285649		B638
181097	2	2444		C70030MN		17276301	10359803	10000353	10000353	17948001	13769301	16285653		B654
181098	2	2444		C70030MN		17276301	10359803	10000353	10000353	17948001	13769301	16285665		B796
181099	2	2444		C70030MN		17276301	10359803	10000353	10000353	17948001	13769301	16285659		B809
181100	2	2445		C70035MN		17276301	10359803	10000353	10000353	17948001	13769301	16285665		B818
181153	6					17019501	16161701	10000379	10000379	15768101	16103801	16284895	10007447	BN32
181154	6					17019501	16161701	10000379	10000379	15768101	16103801	16284892	10007447	BN33
181194	5		2545			17019501	17870201	10000379	10000379	17909101	17870601	16284861	10007447	BN54
181195						17019501	18314101	10000379	10000379	15768101	13903001	16284848	10007447	—
181196						17019501	18314101	10000379	10000379	15768101	13903001	16284848	10007447	BV91
181197						17019501	18314101	10000379	10000379	15768101	13903001	16284848	10007447	BV91
181198						17019501	18314101	10000379	10000379	15768101	13903001	16284848	10007447	BV90
181199						17019501	18314101	10000379	10000379	15768101	13903001	16284848	10007447	BV90
181200						17019501	18314101	10000379	10000379	15768101	13903001	16284848	10007447	BV90
181201						17019501	18314101	10000379	10000379	15768101	13903001	16284848	10007447	BV91
181203	6	2443	2508	C70025MN	C10108EN	17019501	16134501	10000379	10000379	17820201	10008601	16284897	10007473	BN60
181326	5					17019501	17870201	10000379	10000379	17909101	17870601	16284851	10007473	BN36
181327	5		2508			17019501	17870201	10000379	10000379	17909101	17870601	16284851	10007473	BN37
181328	5		2545			17019501	17870201	10000379	10000379	17909101	17870601	16284857	10007473	BN34
181360						17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007447	—
181372	2		2509		C10124EN	17276301	17960001	10000353	10000353	15768101	13769301	16285649	10007447	B638
181373	2		2509		C10124EN	17276301	17960001	10000353	10000353	15768101	13769301	16285653	10007447	B654

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
181374	2		2509		C10124EN	17276301	17960001	10000353	10000353	15768101	13769301	16285655	10007447	B796
181375	2		2509		C10124EN	17276301	17960001	10000353	10000353	15768101	13769301	16285659	10007447	B809
181376	2		2513		C70030MN	17276301	17960001	10000353	10000353	17948001	13769301	16285665		B818
181377		2445		C70035MN		17276301	17960201	10000353	10000353	14710901 15772301	15703101	16285665	10007478	—
181387	2	2443		C70025MN		17276301	17960201	10000353	10000353	15772301	15703101	16285651	10007473	B975
181388	2	2443		C70025MN		17276301	17960201	10000353	10000353	15772301	15703101	16285655	10007473	B975
181389	2	2443		C70025MN		17276301	17960201	10000353	10000353	15772301	15703101	16285659	10007473	B979
181390	2	2445		C70035MN		17276301	17960201	10000353	10000353	15772301	15703101	16285665	10007473	B979
181429	5		2505			17019501	17870201	10000379	10000379	17909101	17870601	16284861	10007473	BN51
181458	5		2503			17019501	17870201	10000379	10000379	17909101	17870601	16284857	10007473	BN50
181484	5		2507			17019501	17870201	10000379	10000379	15768101	17870601	16284861	10007446	BN40
181495	5		15769815			17019501	17870201	10000379	10000379	17909101	17870601	16284861	10007473	BN34
181501	2	2445		C70035MN		14311803	17960201	10000445	10000353	14710901 15772301	15703101	16285660	10007473	B969
181530	5		2509			17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007447	BN32
181531	5		2509			17019501	17870201	10000379	10000379	15768101	17870601	16284857	10007447	BN39
181535						17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	—
181546	5		2507			17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007446	BN35
181547			2509			17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007446	—
181567			2508			17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007446	—
181579	5		15769615			17019501	17870201	10000379	10000379	15768101	17870601	16284861	10007446	BN40
181613						17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	—
181634	5		2545			17019501	17870201	10000379	10000379	17909101	17870601	16284851	10007478	BN52
181635	5		2545			17019501	17870201	10000379	10000379	17909101	17870601	16284857	10007478	BN53
181741														
181748						17019501	16161701	10000379	10000379	15768101	16103801	16284895	10007447	—
181749						17019501	16161701	10000379	10000379	15768101	13903001	16284895	10007447	—
181750						17019501	16161701	10000379	10000379	15768101	13903001	16284895	10007447	—
181751						17019501	16161701	10000379	10000379	15768101	13903001	16284895	10007447	—

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
181793	5					17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007447	BN33
181802														
181871														
181891		2443	2548	C70025MN	C50108EN	17504101	10359603	10000545	10000379	13980901	10377501	16285668	10007446	P130
181893						14386502	10359603	10000446	10000379		10377501	16285656		E177
181894		2443	2553	C70050MN	C50216EN	17504101	10359603	10000545	10000379	17965301	10377501	16285674	17965201	P134
181896						17504101	10359603	10000545	10000379		10377501	16285670		E296
181961	5		2513			17019501	17870201	10000379	10000379	17909101	17870601	16284857	10007473	BN38
182115	4	2444				13871101	17540101	10000445	10000353	17948001	17540201	16285669		B855SE
182145		2445		C70035MN		17520701	17540101	10000445	10000353	17948001		16284878		B116
182258	2	2448		C70050MN		17276301	17960001	10000353	10000353	17948001	13769301	16285649		B657
182259	2	2448		C70050MN		17276301	17960001	10000353	10000353	17948001	13769301	16285653		B638
182260	2	2448		C70050MN		17276301	17960001	10000353	10000353	17948001	13769301	16285655		B654
182261	2	2448		C70050MN		17276301	17960001	10000353	10000353	17948001	13769301	16285659		B796
182262	2	2448		C70050MN		17276301	17960001	10000353	10000353	17948001	13769301	16285665		B809
182267	6					17019501	16161701	10000379	10000379	15768101	16103801	16284895	10007447	BN24
182268	6					17019501	16161701	10000379	10000379	15768101	16103801	16284846	10007447	BN23
182272	5		2507			17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007446	BN35
182273	5					17019501	17870201	10000379	10000379	17909101	18313301	16284851	10007473	BN36
182476	5		15769515			17019501	17870201	10000379	10000379	15768101	17870601	16284861	10007446	BN40
182477	5		2503			17019501	17870201	10000379	10000379	17909101	17870601	16284861	10007473	BN51
182519	5					17019501	1870201	10000379	10000379	15768101	17870601	16284843	10007447	BN24
182520	5					17019501	1870201	10000379	10000379	15768101	17870601	16284843	10007447	BN25
182609		2445		C70035MN		18381801	15742701	10000379	10000379	17886101	13891001	16285646		—
182610		2445		C70035MN		10909202	15742701	10000353	10000353	17886101	13891001	16285652		—
182611		2448		C70050MN		18381801	15742701	10000379	10000379	17886101	13891001	16285652		—
182612		2448		C70050MN		10909202	15742701	10000353	10000353	17886101	13891001	16285656		—
182688	5		2507			17019501	17870201	10000379	10000379	15768101	17870601	16284861	10007446	BN40
182713	5					17019501	17870201	10000379	10000379	17909101	17870601	16284851	10007473	BN36
182714	5		2508			17019501	17870201	10000379	10000379	17909101	17870601	16284851	10007473	BN37

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
182715	5		2545			17019501	17870201	10000379	10000379	17909101	17870601	16284851	10007473	BN34
182716	5					17019501	17870401	10000379		15768101	17870601	16284843	10007447	BN23
182717	5					17019501	17870401	10000379		15768101	17870601	16284843	10007447	BN24
182718	5					17019501	17870401	10000379		15768101	17870601	16284847	10007447	BN25
182719	5		2509			17019501	17870401	10000379		15768101	17870601	16284851	10007446	BN35
182720	5					17019501	17870401	10000379		15768101	17870601	16284851	10007447	BN35
182721	5					17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007447	BN35
182722	5		2545			17019501	17870201	10000379	10000379	17909101	17870601	16284857	10007473	BN35
182745	5		2513			17019501	17870201	10000379	10000379	17909101	17870601	16284857	10007473	BN38
182746	5					17019501	1870201	10000379	10000379	15768101	17870601	16284847	10007447	BN25
182767						17019501	1870201	10000379	10000379	15768101		16284843	10007447	—
182768						17019501	1870201	10000379	10000379	15768101		16284847	10007447	—
182788	1	2448		C70050MN		18341301	17960001	10000445	10000353	17948001	13769301	16285679		B843
182789	1	2444		C70030MN		18341701	17960001	10000353	10000353	17948001	13769301	16285665		B848
182798	5		2507			17019501	17870201	10000379	10000379	15768101	17870601	16284861	10007446	BN40
182820						17019501	17870201	10000379	10000379	13980702	17870601	16284843	10007447	—
182821						17019501	17870201	10000379	10000379	13980702	17870601	16284847	10007447	—
182832	5					17019501	1870201	10000379	10000379	15768101	17870601	16284843	10007447	BN24
182833	5					17019501	1870201	10000379	10000379	15768101	17870601	16284847	10007447	BN25
182834	5					17019501	17870201	10000379	10000379	17909101	17870601	16284851	10007473	BN36
182835	5		2508			17019501	17870201	10000379	10000379	17909101	17870601	16284851	10007473	BN37
182859	5					17019501	17870201	10000379	10000379	17909101	17870601	16284857	10007473	BN34
182862	5	2444	2505	C70030MN		17019501	17870201	10000379	10000379	17909101	17870601	16284861	10007473	BN61
182864	5		2505			17019501	17870201	10000379	10000379	17909101	17870601	16284861	10007473	BN51
182873	5		2505			17019501	17870201	10000379	10000379	17909101	17870601	16284861	10007473	BN51
182895	5		2507			17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007446	BN35
182908	2	2444				17276301	17540101	10000353	10000353	17948001	17540201	16285654		B130
182912	5	2444	2505	C70030MN		17019501	17870201	10000379	10000379	17909101	17870601	16284861	10007473	BN61
182915	5		2507		C10088EN	17019501	16161701	10000379	10000379	15768101		16284853	10007446	BN35
182924	5		2507			17019501	17870201	10000379	10000379	15768101	17870601	16284861	10007446	BN40

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
182990	5					17019501	17870201	10000379	10000379	17909101	17870601	16284851	10007473	BN36
184003	2	2444		C70030MN		17276301	17960001	10000353	10000353	17948001	13769301	16285655		B130
184093						13871101	17960001	10000445	10000353	17927501	13769301	16285683		—
184146		2445		C70035MN		18381801	15742701	10000379	10000379	17886101	13891001	16285646		—
184147		2445		C70035MN		18381801	15742701	10000379	10000379	17886101	13891001	16285652		—
184148		2448		C70050MN		18381801	15742701	10000379	10000379	17886101	13891001	16285652		—
184165	5		2508			17019501	17870201	10000379	10000379	17909101	17870601	16284851	10007473	BN37
184167	5		2508			17019501	17870201	10000379	10000379	17909101	17870601	16284857	10007473	BN50
184168	5		2545			17019501	17870201	10000379	10000379	17909101	17870601	16284857	10007473	BN34
184169	5		2505			17019501	17870201	10000379	10000379	17909101	17870601	16284861	10007473	BN51
184214	1	2444		C70030MN		13871101	17960001	10000445	10000353	17948001	13769301	16285671		B748
184224	5		2505			17019501	17870201	10000379	10000379	17909101	17870601	16284861	10007473	BN61
184229			2508			17019501	17870201	10000379	10000379	17909101	17870601	16284851	10007473	—
184242		2444	2505	C70030MN		17019501	17870201	10000379	10000379	15768101	17870601	16284857	10007446	—
184263		2444	2505	C70030MN		18398601	17870201	10000379	10000379	17909101	17870601	16284863	10007473	—
184300		2445				17520701	17960101	10000445	10000379	17948001	13769301	16285683		—
184317		2448	2505	C70050MN		18398601	17870201	10000379	10000379	15768101	17870601	16284863	10007446	—
184323		2443		C70025MN		17018301	17960001	10000353	10000353	17948001	13769301	16285679		—
184333		2448	2505	C70050MN		18398601	17870201	10000379	10000379	15768101	17870601	16284863	10007446	—
184337	6					17019501	16161701	10000379	10000379	15768101	16103801	16284842	10007447	BN23
184344			2507		C25086EN	17018301	17960001	10000353	10000353	15768101	13769301	16285671	10007444	—
184393	6					17019501	16161702	10000379	10000379	15768101	16103801	16284842	10007447	BN23
184394	6					17019501	16161702	10000379	10000379	15768101	16103801	16284842	10007447	BN24
184395	6					17019501	16161702	10000379	10000379	15768101	16103801	16284895	10007447	BN25
184396		2445		C70035MN		17276301	17960201	10000353	10000353	14710901 15772301	15703101	16285655	10007478	—
184397			2545			17019501	17870201	10000379	10000379	17909101	17870601	16284857	10007473	—
184398			2545			17019501	17870201	10000379	10000379	15768101	17870601	16284861	10007446	—
184518		2444	2505	C70030MN		17019501	17870201	10000379	10000379	15768101	17870601	16284857	10007446	—
184543		2448	2505	C70050MN		18398601	17870201	10000379	10000379	15768101	17870601	16284863	10007446	—

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST

48 AND 56 FRAME

REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
184803						17019501	17870401	10000379	10000379	15768101	17870601	16284843	10007447	—
184947	3	2443				17276301	17540101	10000353	10000353	17948001	17540201	16285650		B657
184948	3	2444				17276301	17540101	10000353	10000353	17948001	17540201	16285650		B638
184949	3	2444				17276301	17540101	10000353	10000353	17948001	17540201	16285654		B654
184950	3	2444				17276301	17540101	10000353	10000353	17948001	17540201	16285662		B796
184951	3	2444				17276301	17540101	10000353	10000353	17948001	17540201	16285662		B809
184952	3	2445				17276301	17540101	10000353	10000353	17948001	17540201	16285670		B818
184969	3	2443				14311820	17540101	10000445	10000353	17948001	17540201	16285648		B227SE
184970	4	2443				17018301	17540101	10000353	10000353	17948001	17540201	16285665		B852
184971	4	2444				17018301	17540101	10000353	10000353	17948001	17540201	16285665		B853
184972	4	2444				17018301	17540101	10000353	10000353	17948001	17540201	16285665		B854
184974	4	2444				13871101	17540101	10000445	10000353	17948001	17540201	16285676		B840
184978		2443		C70025MN		17051101	17960001	10000353	10000353	17948001	13769301	16285654		B667
184980	3	2443				14311820	17540101	10000445	10000353	17948001	17540201	16285648		B227SE
184981	3	2443				14311820	17540101	10000445	10000353	17948001	17540201	16285648		B228SE
184982	3	2443				14311820	17540101	10000445	10000353	17948001	17540201	16285648		B229SE
184983	3	2443				14311820	17540101	10000445	10000353	17948001	17540201	16285657		B230SE
184984	3	2443				14311820	17540101	10000445	10000353	17948001	17540201	16285657		B231SE
184985	4	2444				13871101	17540101	10000445	10000353	17948001	17540201	16285669		B855
186016	1	2444		C70030MN		13871101	17960001	10000445	10000353	17948001	13769301	16285670		B748
186019	4	2444				13871101	17540101	10000445	10000353	17948001		16285676		B859
186020	1	2444		C70030MN		13871101	17960001	10000445	10000353	17948001	13769301	16285670		B840
186021	4	2444				13871101	17540101	10000445	10000353	17948001		16285669		B840
186022	5	2443	2508	C70025MN		17019501	17870201	10000379	10000379	17909101	17870601	16284857	10007473	BN60
186050			2509			17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007446	—
186051			2509			17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007446	—
186052			2507			17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007446	—
186054	5	2444	2505	C70030MN		17019501	17870201	10000379	10000379	17909101	17870601	16284861	10007473	BN61
186062	5		2507			17019501	17870201	10000379	10000379	15768101	17870601	16284861	10007446	BN40
186063	3	2443		C70025MN		17276301	17960001	10000353	10000353	17948001	13769301	16285649		B227SE

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
186066	3	2443		C70025MN		17276301	17960001	10000353	10000353	17948001	13769301	16285659		B230SE
186068						17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007447	—
186071						17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	—
186083	3	2443				17276301	17540101	10000353	10000353	17948001		16285651		B227SE
186084	3	2444				17276301	17960001	10000353	10000353	17948001		16285651		B638
186085	3	2444				17276301	17960001	10000353	10000353	17948001		16285651		B638
186086	3	2444				17276301	17960001	10000353	10000353	17948001		16285655		B654
186087	3	2444				17276301	17960001	10000353	10000353	17948001		16285655		B654
186088	3	2444				17276301	17960001	10000353	10000353	17948001		16285663		B796
186090	3	2444				17276301	17960001	10000353	10000353	17948001		16285663		B796
186091	3	2445				17276301	17960001	10000353	10000353	17948001		16285671		B818
186093	5					17019501	17870201	10000379	10000379	17909101	17870601	16284851	10007473	BN37
186095	5		2545			17019501	17870201	10000379	10000379	15768101	17870601	16284861	10007446	BN40
186097	5	2444	2505	C70030MN		17019501	17870201	10000379	10000379	15768101	17870601	16284857	10007446	BN40
186098						17019501	17870201	10000379	10000379	13980702	17870601	16284843	10007447	—
186099						17019501	17870201	10000379	10000379	13980702	17870601	16284847	10007447	—
186100	5					17019501	17870201	10000353	10000353	17909101	17870601	16284851	10007473	BN36
186111						17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	BN24
186127	6					17019501	16161701	10000379	10000379	15768101	16103801	16284842	10007447	BN24
186128	6					17019501	18314101	10000379	10000379	15768101	13903001	16284848	10007447	BV91
186129	6					17019501	18314101	10000379	10000379	15768101	13903001	16284848	10007447	BV90
186160						17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007447	—
186164						17019501	17870201	10000445	10000379	18354701	15703103	16285683		—
186236	1	2443		C70025MN		17018301	17960001	10000353	10000353	17948001	13769301	16285662		B846
186237	1	2444		C70030MN		13871101	17960001	10000445	10000353	17948001	13769301	16285671		B748
186238		2445		C70035MN		13871101	17960001	10000445	10000353	17948001	13769301	16285679		—
186265	5		2508			17019501	17870201	10000353	10000353	17909101	17870601	16284851	10007473	BN37
186266	5		2508			17019501	17870201	10000353	10000353	17909101	17870601	16284857	10007473	BN38
186267	5		2545			17019501	17870201	10000353	10000353	17909101	17870601	16284857	10007473	BN34
186268	5		2508			17019501	17870201	10000353	10000353	17909101	17870601	16284857	10007473	BN50

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

CENTURY POOL AND SPA MOTOR PARTS LIST
48 AND 56 FRAME
REPLACEMENT PARTS AND MOTORS

Motor Part # (EMI)	Drawing #	Run Capacitor	Start Capacitor	Run Capacitor Assembly ★	Start Capacitor Assembly ★	Drive End Bracket	Opposite Drive End Bracket	Drive End Bearing	Opposite Drive End Bearing	Terminal Board (Switch)	Terminal Area Cover	Thru-Bolts	Governor	Century Catalog Replacement
186269						17019501	17870201	10000379	10000379	15768101	17870601	16284851	10007447	—
186270	5	2444	2505	C70030MN		17019501	17870201	10000379	10000379	17909101	17870601	16284861	10007473	BN61
186276	5		2508			17019501	17870201	10000379	10000379	17909101	17870601	16284857	10007473	BN50
186285	5	2444	2505	C70030MN		17019501	17870201	10000379	10000379	17909101	17870601	16284861	10007473	BN61
186307						17019501	17870201	10000379	10000379	15768101	17870601	16284847	10007447	—

★ Capacitor assembly includes the capacitor, capacitor cover and fasteners. For Flex-48 and Centurion SE motors, the capacitor clamp is supplied instead of the capacitor cover.

56 Frame, Two Speed Toggle Switch Assembly Microswitch & Mounting Bracket

Motor Part Number										
176894	177063	177103	177145	• Air Switch	17800901	EMI 186562				
					17800901	EMI 187384				
					17800901	EMI 187576				
					17800804	EMI 187732				
						EMI 187809				
					18882101	EMI 186665				
177055	177064	177105	177146	• Toggle Switch, Terminal Area Cover, Gasket and Leads - 17590450						
177056	177065	177107	177174							
177057	177066	177111	177351	• Microswitch	14710901	187524	187694	177389	182772	
						187563	187855	177454	182773	
						187590	193107	177455	182774	
						187692	193108	177456	184396	
177058	177067	177112	177631			187693	177175	177457	184809	
							177250	182771	184833	
177059	177068	177115	181387						184884	
									184894	
177060	177069	177132	181388					186300		
177061	177070	177143	181389	• Microswitch Mounting Brackett - 15661701						
177062	177100	177144	181390	• Spec. Switch - 175406	190502	190506				
						190503	190507			
						190504	190508			
						190505				

Motor Replacement Parts Specifications

Replacement Part Name	Part #	Description	Case Length	Case Diameter	Thru-Bolts					
					Size: 8-32	Length	Size: 10-32	Length	Size: 10-32	Length
Run Capacitor • UL Listed • 7.5 & 10 MFD Oval Case • 15-50 MFD Round Case	17035501	7.5 MFD, 370 Volt	2.875"		16284843	7.25"	16285643	7.25"	16285662	9.63"
	17035502	10 MFD, 370 Volt	3.000"		16284846	7.63"	16285646	7.63"	16285663	9.75"
	2440	15 MFD, 370 Volt	2.875"	1.750"	16284847	7.75"	16285648	7.88"	16285664	9.88"
	2443	25 MFD, 370 Volt	2.875"	1.750"	16284851	8.25"	16285649	8.00"	16285665	10.00"
	2444	30 MFD, 370 Volt	2.875"	1.750"	16284853	8.50"	16285651	8.25"	16285666	10.13"
	2445	35 MFD, 370 Volt	2.875"	2.000"	16284857	9.00"	16285652	8.38"	16285669	10.50"
	2448	50 MFD, 370 Volt	3.750"	2.000"	16284862	9.63"	16285653	8.50"	16285671	10.75"
Start Capacitor • Round Case	15769521	88/106 MFD, 110 Volt	2.750"	1.438"	16284893	8.56"	16285654	8.63"	16285672	10.88"
	2508 OR	108/130 MFD, 110 Volt	2.750"	1.438"	16284895	8.06"	16285655	8.75"	16285674	11.13"
	15769525	124/149 MFD, 110 Volt	2.750"	1.438"	16284896	8.81"	16285656	8.88"	16285675	11.25"
	2513 OR	189/227 MFD, 110 Volt	3.375"	1.438"	16284898	9.31"	16285658	9.13"	16285676	11.38"
	2509 OR	216/260 MFD, 110 Volt	3.375"	1.438"	16284899	9.56"	16285659	9.25"	16285678	11.62"
	15769541	324/389MFD, 110 Volt	3.375"	1.818"			16285660	9.38"	16285679	11.75"
	15769545	400/480 MFD, 110 Volt	3.375"	1.818"			16285661	9.50"	16285680	11.88"
	15769549	540/648MFD, 110 Volt	3.375"	1.818"						
	15769625	189/227 MFD, 125 Volt	3.375"	1.438"						
	15769633	270/324 MFD, 125 Volt	3.375"	1.818"						
	15769813	43/52 MFD, 220 Volt	3.375"	1.438"						
	15769815	53/64 MFD, 220 Volt	2.750"	1.438"						
	15769824	108/130 MFD, 220 Volt	3.375"	1.818"						
	Ball Bearings	10000353	#203 Double Sealed							
10000445		#304 Double Sealed								